

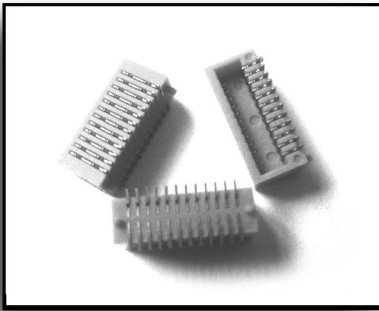



0.8mm(0.0315") Board To Board  
 Side Entry Without Locating Peg Female  
 12,14,16,18,20,24,26,30 Contact

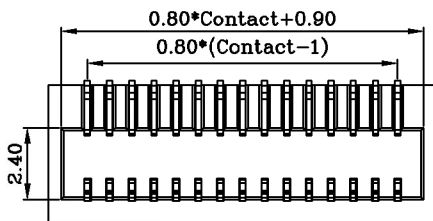


● SPECIFICATIONS ●


**Current Rating:** 0.75A@80°C ambient  
**Operating Temp Range:** -40°C to +125°C  
**Insulator Material:** LCP(UL94V-0)  
**Contact Material:** Phosphor Bronze  
**Max Processing Temp:** 260°C for 10 seconds  
**Plating:** Standard Plating G1  
**Unit:** mm  
**Unspecified Tolerance:** ±0.2

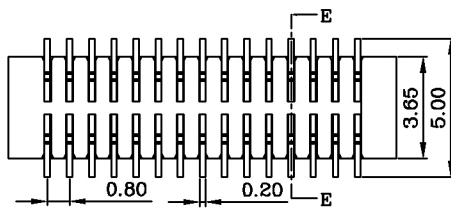

ASSEMBLY



SECTION: E-E

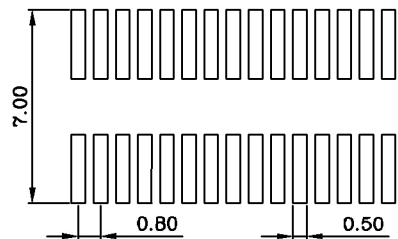

P.C.B LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands  
 How to order Please fill in "X" with appropriate codes listed in the tables below.

**J 0 2 0 1 5 - X X X G 1 N L O G X**

Number of Contact  
xxx contacts

Contact Plating  
\*Standard Plating : G1 1u"  
Other plating, please refer to Page 1

Base Color

N Natural

Insulator

L LCP

Female Height

G 3.65mm

Packing  
please refer to Page 1

O Without locating Peg