





1.27x1.27mm(0.05"x0.05") Female Header,
Straight Dual Row 04 to 50 Contacts

● SPECIFICATIONS ●

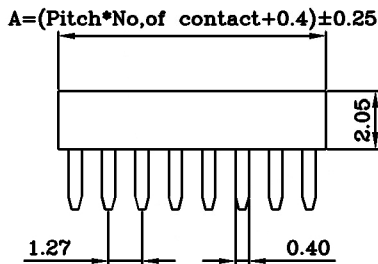

Current Rating: 1.0A@80°C ambient
 Operating Temp Range: -40°C to +125°C
 Insulator Material: NYLON-6T (UL94V-0)
 Contact Material: Phosphor Bronze
 Max Processing Temp: 260°C for 10 seconds
 Plating: Standard Plating G1
 Unit: mm
 Unspecified Tolerance: ±0.2



P.C.B LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands
 How to order Please fill in "X" with appropriate codes listed in the tables below.

J 0 6 0 8 4 - D A X X X G 1 N B O N - X

