



1.27x1.27mm(0.05"x0.05") Female Header,  
SMT Dual Row 06 to 50 Contacts




● SPECIFICATIONS ●




Current Rating: 1.0A@80°C ambient  
 Operating Temp Range: -40°C to +125°C  
 Insulator Material: NYLON-6T (UL94V-0)  
 Contact Material: Phosphor Bronze  
 Max Processing Temp: 260°C for 10 seconds  
 Plating: Standard Plating G1  
 Unit: mm  
 Unspecified Tolerance: ±0.2



(Without locating Peg)

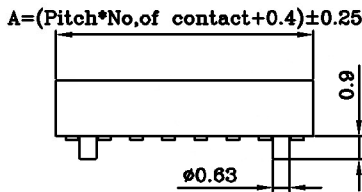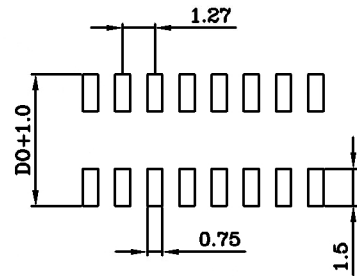

(With locating Peg)

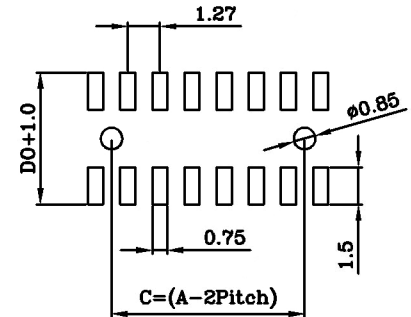

P.C.B LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands  
 How to order Please fill in "X" with appropriate codes listed in the tables below.

J 0 6 0 8 4 - S S X X X G 1 N B X N - X

