



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO JEN JIA PRECISION TECHNOLOGY CO.,LTD, ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF JEN JIA PRECISION TECHNOLOGY CO.,LTD IS STRICTLY PROHIBITED.




ROHS COMPLIANT

REVISIONS





REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
1		PROPOSAL DRAWING	Helly Luo	2016-07-30



SECTION B-B

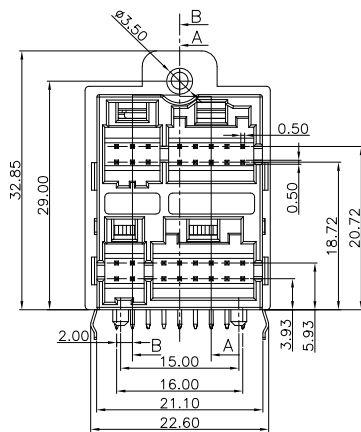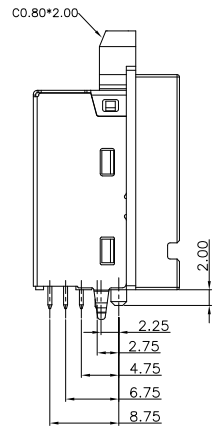

SECTION A-A

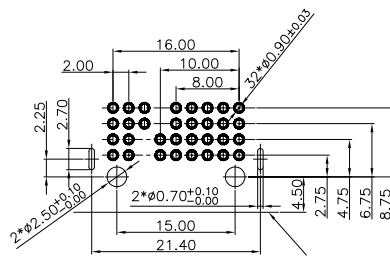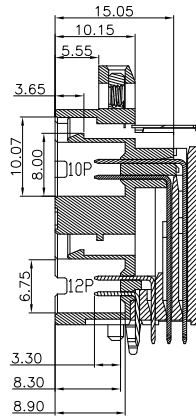

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCE:±0.05mm(T=1.60)

NOTE:

- Material:
Housing: Thermoplastics,UL94V-0; PBT
Contact: C2680-H T=0.50*0.50mm;
Shell: C2680-H T=0.30mm;
- FINISH:
Contact: 100u' Min.Tin Plated Over All
50u' Min.Nickel Underplating Over All.
Shell: 80-120u" Min.TIN Over All.

SPECIFICATION:

- Current leakage:3mA MAX;
- Contact resistance:
30mΩ Max(Initial),10mΩ Min.(Final)
- Insulation resistance:
100mΩ Min(Initial),100mΩ Min.(Final)
- Terminal Retention Force: After IR 3KG Min.

J16087-AG20C 1 3201-T

胶芯: PBT&NATURAL
外壳:1、铜壳(C2680)
0、不带铜壳
PIN数: 32PIN
PLATING:
01:亮锡(80 μ ")
02:亮锡(100 μ ")
03:亮锡(120 μ ")
05:亮锡(150 μ ")

DIMENSIONS:
 MM INCH MM ONLY
(INCH) (MM) (INCH)

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:
DECIMALS ANGLES
X. ±0.38 [0.015] X° ±3°
.X ±0.30 [0.012] .X° ±1.0°
.XX ±0.20 [0.008]

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

THIRD ANGLE PROJECTION



JJP Jen Jia Precision Technology Co., Ltd.

TITLE PIN HEADER双层32P针座WITH屏蔽壳

PART NO.	J16087-AG20C13201-T	APPROVED BY	JASON MENG
DRAWING NO.	J16087-AG20C13201-T	CHECKED BY	STEVEN LIU
MATERIAL		DRAWN BY	Helly Luo
FINISH		GENERATD DATE	2016-07-30
SCALE	FREE	SHEET	1/1
REV.	1	SIZE:	A4
		FILE NO.:	JJP-A-05-003

DO NOT SCALE DRAWING