

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO JEN JIA PRECISION TECHNOLOGY CO.LTD, ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF JEN JIA PRECISION TECHNOLOGY CO.LTD IS STRICTLY PROHIBITED.

ROHS COMPLIANT

REVISIONS








REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
1		PROPOSAL DRAWING	Helly Luo	2016-04-15

NOTE:

- Material:
Housing: Thermoplastics,UL94V-0; PBT
Contact: C2680-H T=0.60*0.60mm;
- FINISH:
Contact: 100u' Min.Tin Plated Over All
50u' Min.Nickel Underplating Over All.

SPECIFICATION:

- Current leakage:3mA MAX;
- Contact resistance:
30mΩ Max(Initial).10mΩ Min.(Final)
- Insulation resistance:
100mΩ Min(Initial).100mΩ Min.(Final)
- Terminal Retention Force: After IR 3KG Min.
- 螺母孔用M2*6mm自攻螺钉来回3kgf/10次无开裂现象。

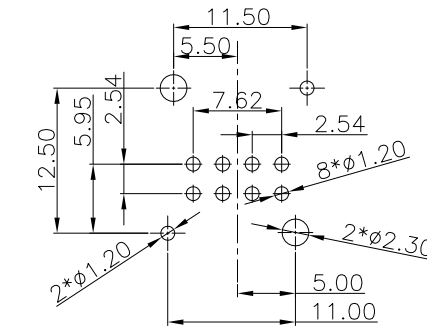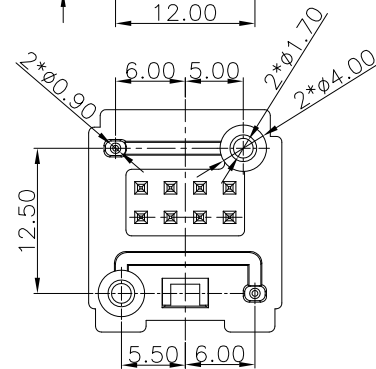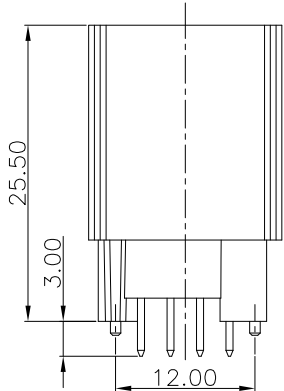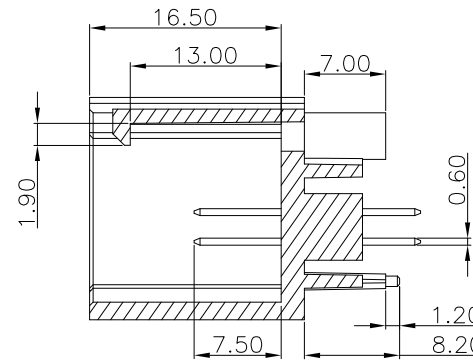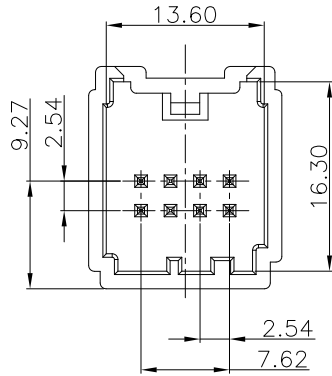

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCE±0.05mm(T=1.60)

2	TERMINAL	C2680-H 0.60*0.60mm	Sn-PLATED
1	Housing	PBT 30%GF Black	UL94V-0

DIMENSIONS:
 MM [INCH] INCH [MM] MM ONLY

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:

DECIMALS ANGLES
X. ±0.35 X° ±2°
.X ±0.25 .X° ±1.0°
.XX ±0.20

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

THIRD ANGLE PROJECTION



JJP Jen Jia Precision Technology Co., Ltd.

TITLE		PH8P 直立式DIP 针座	
PART NO.	J16089-AG40C10801-T	APPROVED BY	JASDN MENG
DRAWING NO.	J16089-AG40C10801-T	CHECKED BY	STEVEN LIU
MATERIAL		DRAWN BY	Helly Luo
FINISH		GENERATD DATE	2016-04-15
SCALE	FREE	SHEET	1/1
REV.	1	SIZE:	A4
FILE NO.:	JJP-A-05-003		

DO NOT SCALE DRAWING