
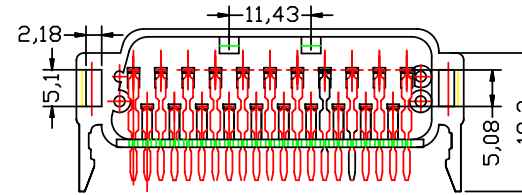



ROHS COMPLIANT



REV.	DESCRIPTION	ECN NO.	DATE	DRAW	APPROV.
A	NEW RELEASE		2006-12-11	John	Jason

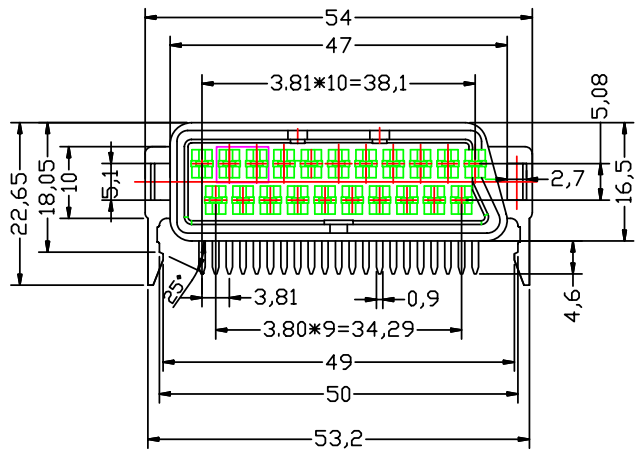

MATERIAL:
 A.INSULATION: PC(94V-2)&GLASS FIBER
 B.CONTACT:BRONZE
 C.CONTACT PLATED:TIN PLATED

SPECIFICATION:
 A.CURRENT RATE:3A/250V AC

CONTACT RESISTANCE:
 A.(BRONZE) 11.5mohm AT 2V,DC 100mA
 B.(PHOSPHOR BRONZE) 10.9mohm AT 2V DC 100mA
 C.INSULATOR RESISTANCE:1.5Gohm AT 500V DC 1 Min
 D.DIELECTRIC WITHSTANDING:1000V or 1Min.

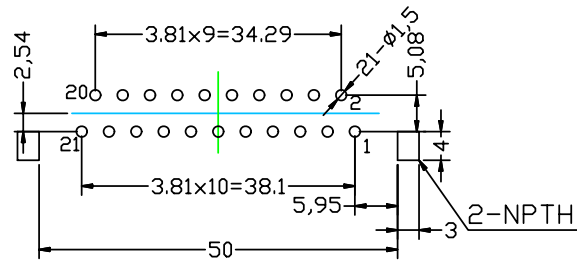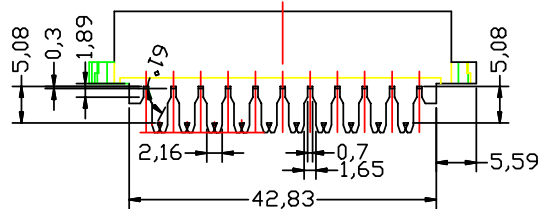

PCB HOLD PATTEN

JJP Jen Jia Precision Co., LTD.

TITLE		SCART JACK Connector,Right angle			
PART NO.		J19311820-3008	APPRD	Mark	
DRAW NO.		J19311820-3008	CHKD	Steve	
THIRD ANGLE PROJECTION		DRAW		John	
DATE		2006-12-11			
SCALE	SHEET	REV	UNIN		
1:1	1/1	A	MM		

INTENDED USE		CUSTOMER	
TOLERANCES			
LINEAR ANGLES	0.	±0.30	
	0.0	±0.20	
	0.00	±0.10	
	0.*	±4*	
	0.0*	±2*	