






ROHS COMPLIANT

| REV. | DESCRIPTION | ECN NO. | DATE | DRAW | APPROV. |
|------|---------------------------|---------|------------|------|---------|
| B | a1,a32,c1,c32 plus longer | | 2010-02-22 | John | Jason |
| C | add lock | | 2010-02-25 | John | Jason |

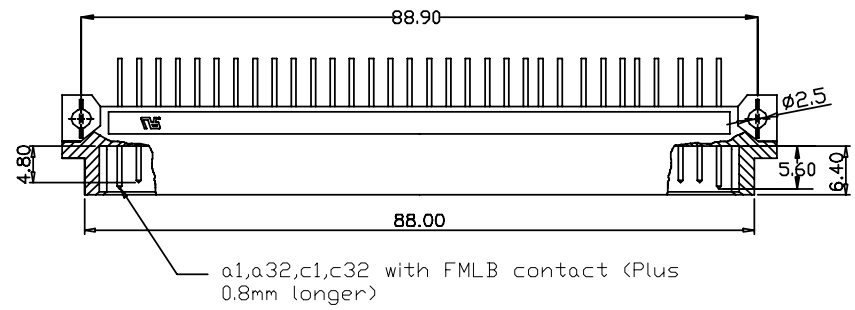

Material:
 Housing: PBT+GF30% UL94V-0,COLOR:WHITE;
 Contacts: Brass T=0.60.
 Lock:Phosphor Bronze.

Specification:
Electrical Characteristics:
 Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩmin. at DC 500V.
 Contact Resistance: 30mΩ Max.at DC 100mA.
 Operating Temperature: -55°C~+105°C

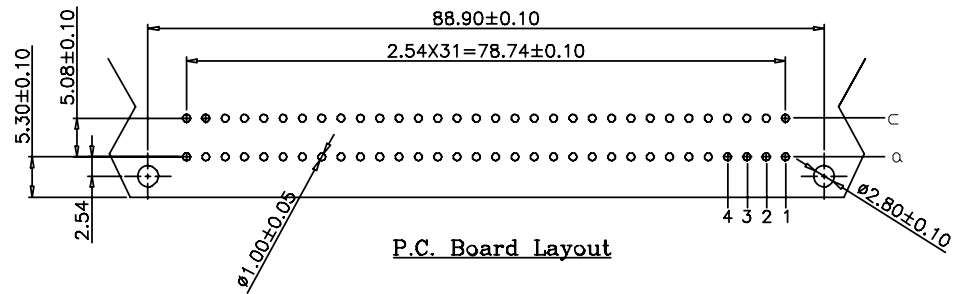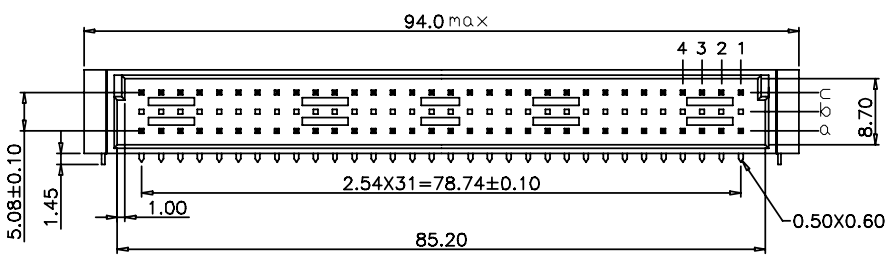

J2084-64 C XX L1 A
 Pin no. _____ Tray Package
 C:DIP Tin _____ L1:With Lock
 Contact Gold _____ Blank:W/D lock
 G:Gold Plated _____
 00:G/F
 10:10U"
 15:15U"
 30:30U"

| | | | |
|--|---|-------|------------|
| JJP Jen Jia Precision Co., LTD. | | | |
| TITLE | DIN41612 Series,64Pin With locking type | | |
| PART NO. | J2084-64CXXL1A | APPRD | Mark |
| DRAW NO. | J2084-64CXXL1A | CHKD | Steve |
| THIRD ANGLE PROJECTION | | DRAW | John |
| | | DATE | 2010-02-25 |
| SCALE | SHEET | REV | UNIN |
| 1:1 | 1/1 | C | MM |

| | |
|------------|-------|
| TOLERANCES | |
| .x | ±0.25 |
| .xx | ±0.13 |

