


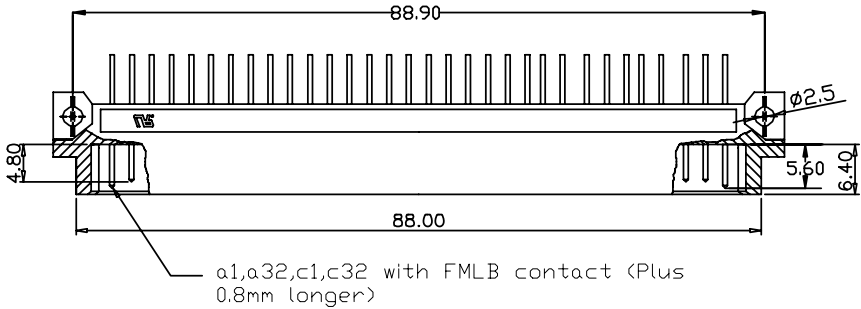


ROHS COMPLIANT

REV.	DESCRIPTION	ECN NO.	DATE	DRAW	APPROV.
B			2010-02-22	John	Jason
C	add lock		2010-02-25	John	Jason




Material:
 Housing: PBT+GF30% UL94V-0,COLOR:WHITE;
 Contacts: Brass T=0.60,
 Lock:Phosphor Bronze.

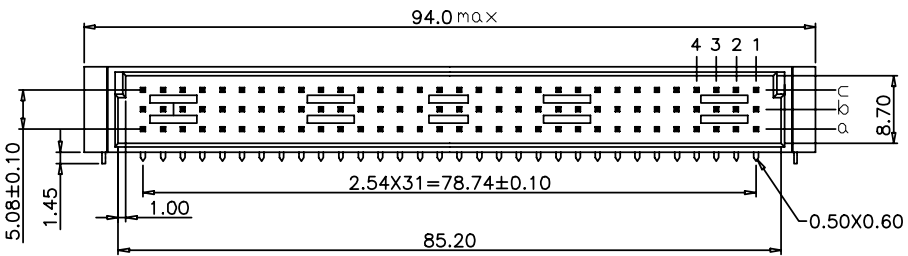

Specification:
 Electrical Characteristics:
 Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩmin. at DC 500V.
 Contact Resistance: 30mΩ Max.at DC 100mA.
 Operating Temperature: -55°C~+105°C

J2084-96 C XX L1 A
 Pin no. _____ Tray Package
 C:DIP Tin _____ L1:With Lock
 Contact Gold _____ Blank:W/D lock
 G:Gold Plated _____
 _____ 00:G/F
 _____ 10:10U"
 _____ 15:15U"
 _____ 30:30U"

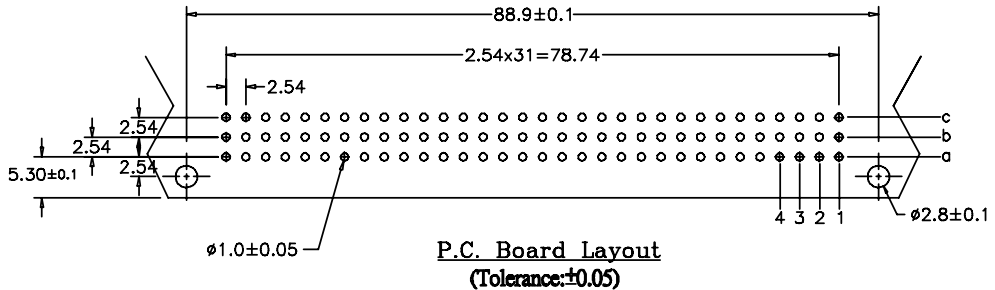

JJP Jen Jia Precision Co., LTD.			
TITLE	DIN41612 Series,96Pin With locking type		
PART NO.	J2084-96CXXL1A	APPRD	Mark
DRAW NO.	J2084-96CXXL1A	CHKD	Steve
THIRD ANGLE PROJECTION		DRAW	John
		DATE	2010-02-25
SCALE	SHEET	REV	UNIN
1:1	1/1	C	MM

TOLERANCES	
.x	±0.25
.xx	±0.13