

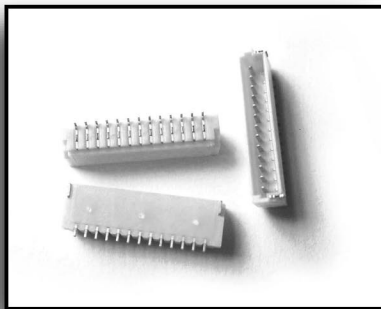
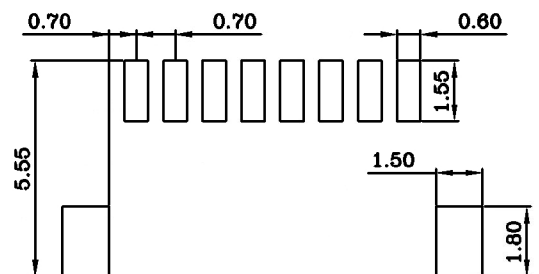



1.0mm(0.0394") Wafer
Horizontal SMT Single Row 02 to 20 Contacts

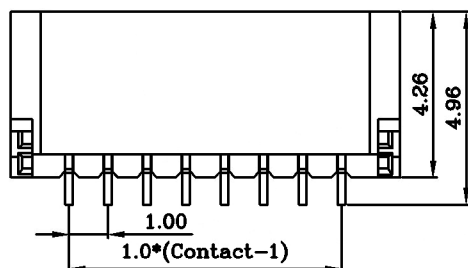

● SPECIFICATIONS ●

Current Rating:	0.75A@80°C ambient
Operating Temp Range:	-40°C to +125°C
Insulator Material:	NYLON-6T(UL94V-0)
Contact Material:	Phosphor Bronze
Max Processing Temp:	260°C for 10 seconds
Plating:	Standard Plating T3
Unit:	mm
Unspecified Tolerance:	±0.2

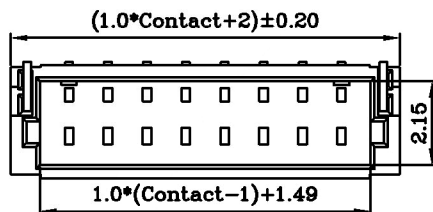

P.C.B LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands
How to order Please fill in "X" with appropriate codes listed in the tables below.

J 2 3 1 8 1 - H S X X X T 3 N N N X

PCB Contact Type
H Horizontal SMT

S Single Row

Number of Contact
02 to 20 contacts

Contact Plating
*Standard Plating : T3 Matte Sn
Other plating, please refer to Page 1

"K" Point
N Without "K"

Base Color
N Natural
Other

Insulator
N NY-6T

Packing
please refer to Page 1