

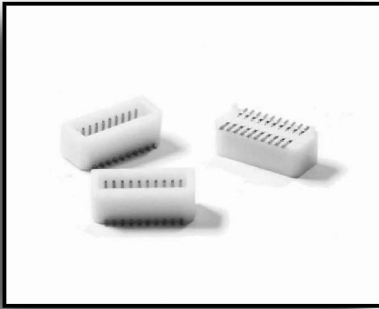




1.25mm(0.049") Wafer  
 Right Angle Single Row 02 to 15 Contacts

● SPECIFICATIONS ●

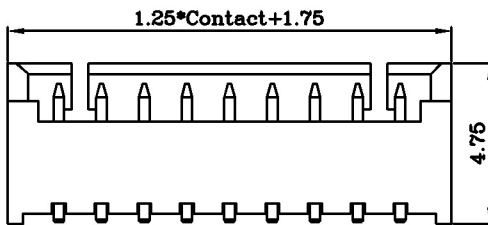

<b>Current Rating:</b>	<b>0.75A@80°C ambient</b>
<b>Operating Temp Range:</b>	<b>-40°C to +125°C</b>
<b>Insulator Material:</b>	<b>NYLON-66(UL94V-0)</b>
<b>Contact Material:</b>	<b>Phosphor Bronze</b>
<b>Max Processing Temp:</b>	<b>230°C for 10 seconds</b>
<b>Plating:</b>	<b>Standard Plating T2</b>
<b>Unit:</b>	<b>mm</b>
<b>Unspecified Tolerance:</b>	<b>±0.2</b>

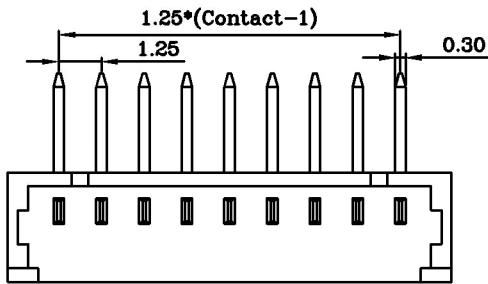

P.C.B LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands  
 How to order Please fill in "X" with appropriate codes listed in the tables below.

**J 2 3 1 8 2 - R S X X X T 2 N N A X**

PCB Contact Type  
**R Right Angle**

**S Single Row**

Number of Contact  
 02 to 15 contacts

Contact Plating  
 \*Standard Plating : T2 Sn  
 Other plating, please refer to Page 1

"K" Point  
**N Without "K"**

Base Color  
**N Natural**  
**Other**

Insulator  
**A NY-66**

Packing  
 please refer to Page 1