

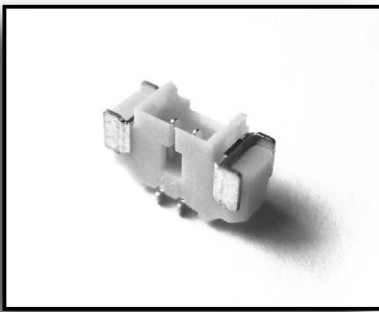
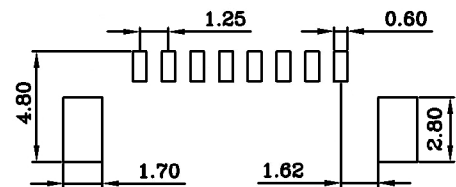
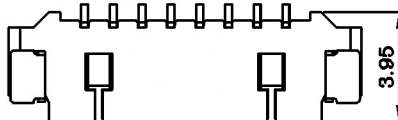



1.25mm(0.049") Wafer
Horizontal SMT Single Row 02 to 15 Contacts

● SPECIFICATIONS ●

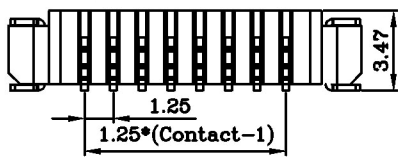

Current Rating: 0.75A@80°C ambient
 Operating Temp Range: -40°C to +125°C
 Insulator Material: NYLON-6T(UL94V-0)
 Contact Material: Phosphor Bronze
 Max Processing Temp: 260°C for 10 seconds
 Plating: Standard Plating T2
 Unit: mm
 Unspecified Tolerance: ±0.2

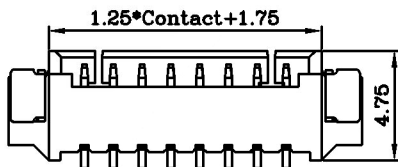

P.C.B LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands
 How to order Please fill in "X" with appropriate codes listed in the tables below.

J 2 3 1 8 3 - H S X X X T 2 N N N X

