

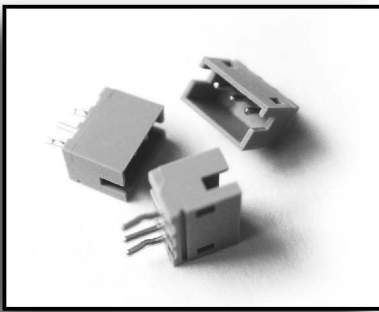




1.5mm(0.059") Wafer
Straight Single Row 02 to 13 Contacts

● SPECIFICATIONS ●

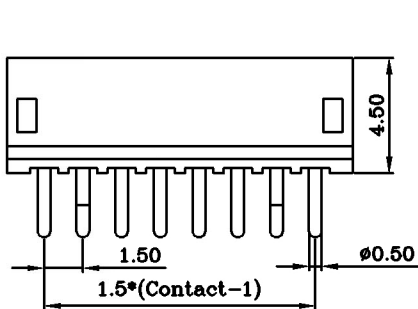

Current Rating:	2.0A@80°C ambient
Operating Temp Range:	-40°C to +125°C
Insulator Material:	NYLON-66(UL94V-0)
Contact Material:	Brass
Max Processing Temp:	230°C for 10 seconds
Plating:	Standard Plating T2
Unit:	mm
Unspecified Tolerance:	±0.2

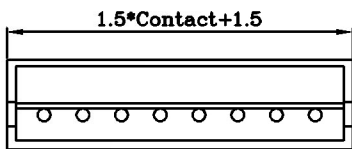

P.C.B LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands
How to order Please fill in "X" with appropriate codes listed in the tables below.

J 2 3 1 8 4 - D S X X X T 2 O N A X

PCB Contact Type
D Straight

S Single Row

Number of Contact
02 to 13 contacts

Contact Plating
*Standard Plating : T2 Sn
Other plating, please refer to Page 1

"K" Point
O Out "K"

Base Color
N Natural
Other

Insulator
A NY-66

Packing
please refer to Page 1