
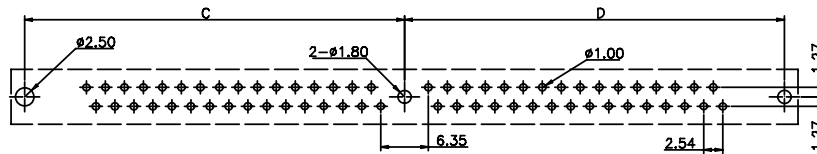

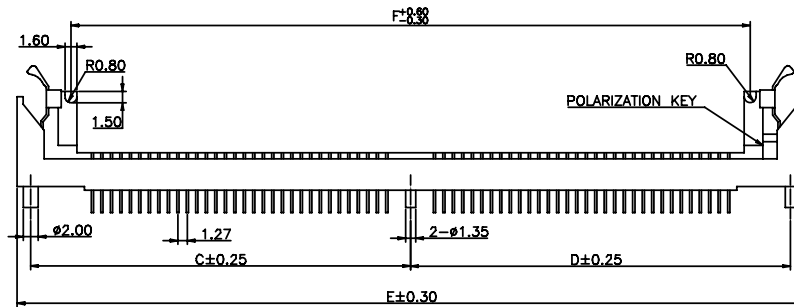


THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO JEN JIA PRECISION TECHNOLOGY CO.LTD, ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF JEN JIA PRECISION TECHNOLOGY CO.LTD IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS

REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A		PROPOSAL DRAWING	JASON MENG	2007-09-18

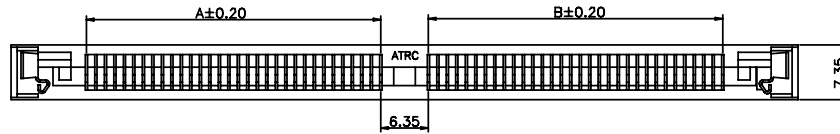

TOP VIEW
PCB LAYOUT RECOMMENDED

PINS	A	B	C	D	E	F
64	39.37	39.37	50.80	50.80	105.23	91.03
68	41.90	41.90	53.34	53.34	110.31	96.11
72	44.45	44.45	55.78	55.78	115.45	101.19
80	49.53	49.53	60.90	60.90	125.75	111.35

SIMM Socket, Pitch 1.27mm,
Standard Key, Plastic Post, Type 5.
Physical:
Housing: LCP OR NY, UL94V-0
Contact: Copper Alloy
Specifications:
Current Rating: 1A
Insulation Resistance: 1000M ohm min
Contact Resistance: 30m ohm max
Dielectric Withstanding Voltage:
AC 500V For 1 Minute
Temperature Rating: -55°C To +105°C
Wave Soldering Temperature:
Lead Part: 245±5°C, 5sec
RoHS Part: 260±5°C, 5sec
ORDERING CODE:
 $\frac{J84139-72100-LF}{12345}$

- SERIES NO.
- NO. OF PINS
72=72PINS
- MATERIAL & COLOR
1=LCP/IVORY 2=NY/IVORY
- PLATED
00=TIN PLATED
01=SELECTIVE GOLD FLASH
11=FULL GOLD FLASH
- PRODUCT'S STATUS
NON-SHOWED=STANDARD TYPE
LF=RoHS COMPLIANT

DO NOT SCALE DRAWING

DIMENSIONS:
 MM [INCH] INCH [MM] MM [ONLY]

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:
 DECIMALS ANGLES
 X. ±0.38 [0.015] X° ±3°
 .X ±0.25 [0.010] .X° ±1.0°
 .XX ±0.13 [0.005]

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

THIRD ANGLE PROJECTION

JJP Jen Jia Precision Technology Co., Ltd.

TITLE		SIMM SOCKET	
PART NO.	J84139-72-1-00-LF	APPROVED BY	JASON MENG
DRAWING NO.	J84139-72-1-00-LF	CHECKED BY	STEVEN LIU
MATERIAL		DRAWN BY	ANNIE WANG
FINISH		GENERATED DATE	2007-09-18
SCALE	1:1	SHEET	1/1
REV.	A	SIZE:A4	FILE NO.:JJP-A-05-003